


# Technical Specifications

KRD11 Series Pneumatic Vertical  
Shock Test System

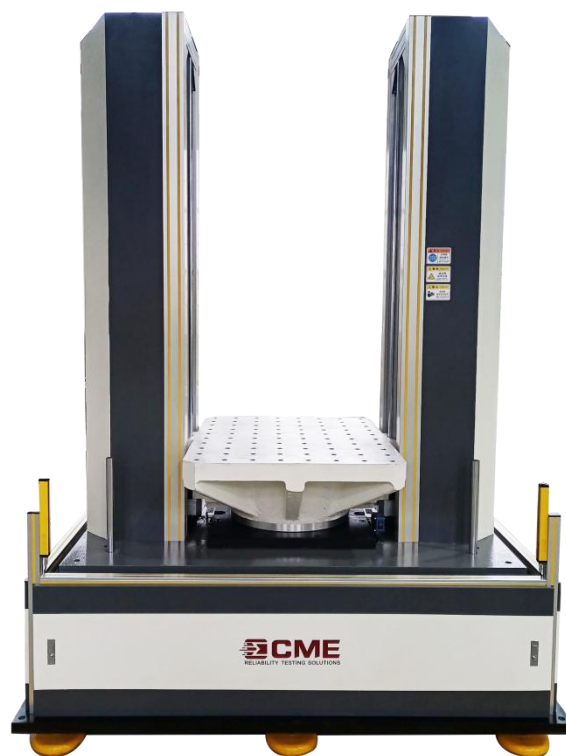

KRD11 series pneumatic vertical shock test system is featured with advanced design, high degree of automation and reliability, simple operation and convenient maintenance. The system meets the requirements of both shock and bump test, can perform conventional half-sine wave, post-peak sawtooth wave, square wave and other waveform shock tests.

- Pneumatic drive, simple structure and high reliability, without hydraulic leak risk.
- Maximum shock rate up to 120 times / min.
- Impact testing for small pulse lower to 0.3ms
- Shock testing machine with high acceleration is up to 3000g
- It can easily realize large shock pulse width and small overload test.
- With a fast shock rate comparing to motor or hydraulic driven bump table, it has higher reliability and better bump waveform.
- The speed and rate of shock can be easily controlled by adjusting the gas pressure.
- IPS-2000 shock control and measurement system can perform manual shock, continuous shock (bump test), single shock, and interval shock.
- Built-in brake mechanism ensures the safety of operation in any situation.

### Technical Specifications

Model		KRD 11-5	KRD 11-15	KRD 11-25	KRD 11-50	KRD 11-100	KRD 11-200	KRD 11-400	KRD 11-600	KRD 11-800	KRD 11-1000	KRD 11-2000
Parameters		11-5	11-15	11-25	11-50	11-100	11-200	11-400	11-600	11-800	11-1000	11-2000
Rated Load (kg)		5	15	25	50	100	200	400	600	800	1000	2000
Table Size (mm)		150×150	200×200	300×300	500×500	600×600	800×600	800×800	1000×800	1000×1000	1200×1200	1500×1200
Peak Acc. (g)	Half-Sine	5-2.5k	5-2k	5-1500	10-750	10-600	10-450	10-400	10-300	10~300	10~250	10~150
	Post-Peak Sawtooth	10-200					10-100				10-50	
	Trapezoid	\			15-200		15-100		15-60		15-50	
Pulse Duration (ms)	Half-Sine	0.5~40	1~40	0.6~60	1.5~60	2~60	2.5~60	3~60	3.5~60	4~60	4.5~60	6~60
	Post-Peak Sawtooth	3~18						6~18				
	Trapezoid	\			3~18		6~18					
Bump Waveform		Half sine wave										
Bump Peak Acceleration (g)		4~150				5~100						
Bump Pulse Duration (ms)		2~30				3~30						
Overall Dimension (mm)		1000×1000 ×2100	1200×1000 ×2200	1400×1200 ×2300	1600×1400 ×2300	1700×1500 ×2300	1700×1500 ×2300	1900×1500 ×2450	1900×1500 ×2450	2000×1500 ×2450	1900×1800 ×2550	2200×1800 ×2550
Weight (kg)		700	800	1000	1800	2500	2800	3800	4000	4800	5200	6000

Bump Rate (Times/Min)		10~120
Installation Condition	Environment	Temperature range 0 ~ 40°C; Humidity ≤ 80%, non-condense
	Power	AC220V±10%, 50Hz
	Air source	≤0.8MPa
	Floor	Foundation-free, the cement floor shall be leveled and the working distance of 800 ~ 1000mm shall be reserved around the equipment
Standards		MIL-STD-810F IEC68-2-27 UN38.3 IEC62281 IEC62133-2 UL2054 IEEE1625 SAEJ2929 IEC62660-2 ISO12405-3 UL2580

**Note:** The parameters in the table are for reference only, and the parameters agreed upon by the supplier and the buyer shall prevail.